

# GRIFLEX

hose & ducting solutions

#### Also Available

- CD - Water Delivery Hose
- CDFG - Non-Toxic Delivery Hose
- CDAS - Anti-Static Delivery Hose
- CDLXE - Lightweight Super Elastic Delivery Hose



## CDLXE

### Lightweight Water Delivery Hose, Super Elastic

*A lightweight PVC hose, reinforced with a rigid crush resistant PVC helix. It is tough, flexible and extremely durable under normal operating conditions. It has outstanding resistance to the effects of weather. Minimum frictional loss is achieved by the smooth bore.*

#### Applications

Delivery and light duty suction of water, slurries and powders. This product is particularly popular in the agricultural, horticultural, marine and construction industries. Within the agricultural industry the hose is specifically used for conveying liquid fertilisers, dilute chemicals and insecticides.

#### Construction

Crush resistant anti-shock PVC spiral helix encapsulated in a flexible PVC cover, with a smooth inside wall.

#### Colour

Standard - Transparent Green, Transparent Yellow, Black

#### Temperature Range

-10°C to +55°C

#### Size Range


1/2" to 2"  
20mm to 45mm

#### Standard Length

20mm to 45mm

#### Special Features

- Optimum flow is maintained by the smooth bore
- Tough, flexible and extremely durable under normal operating conditions
- Flexibility maintained even under cold weather conditions
- Outstanding resistance to the effects of weather

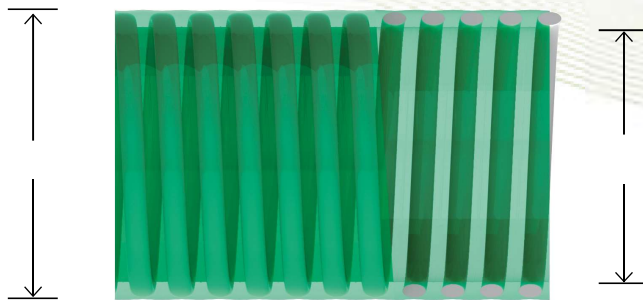

od outside diameter  
id internal diameter

### CDLXE - Lightweight Water Delivery Hose, Super Elastic

Product Ref.	Internal Dia. Inches	Internal Dia. mm	External Dia. mm	Wall Thickness Overall mm	Weight kg/m	Min. Bend Radius mm	Vacuum m of H <sub>2</sub> O	Working Pressure Bar	Coil Length Metres
CDLXE05	1/2"	12.0	16.0	1.7	0.11	57	7	3.2	30 / 50
CDLXE06	5/8"	16.0	21.0	2.5	0.17	72	7	3.2	30 / 50
CDLXE07	3/4"	19.0	24.0	2.5	0.19	86	7	3	30 / 50
CDLXEM20	Metric	20.0	25.2	2.6	0.20	110	7	2.9	30 / 50
CDLXE10	1"	25.4	31.0	2.8	0.27	114	7	2.8	30 / 50
CDLXEM28	Metric	28.0	33.8	2.9	0.30	125	7	0.27	30 / 50
CDLXEM30	Metric	30.0	36.0	3	0.33	136	7	2.7	30 / 50
CDLXE12	1 1/4"	32.0	38.0	3.1	0.35	143	7	2.7	30 / 50
CDLXEM35	Metric	35.0	41.6	3.3	0.42	160	7	2.5	30 / 50
CDLXE15	1 1/2"	38.0	45.0	3.5	0.46	171	7	2.3	30 / 50
CDLXEM40	Metric	40.0	47.0	3.5	0.48	185	7	2.2	30 / 50
CDLXEM45	Metric	45.0	52.0	3.5	0.64	213	7	2.1	30 / 50
CDLXE20	2"	51.6	59.6	4.0	0.74	230	7	2	30 / 50

All sizes are nominal and normal manufacturing tolerances apply.

Special Sizes are available on request but may be subject to Minimum Order Quantities and Leadtimes.

- (i) Maximum working pressure is based on a factor of safety of 3:1 on short term burst pressure at 20°C. If the temperature increases, please refer to the temperature pressure charts.
- (ii) Lengths detailed above are as standard, however variations may be available subject to minimum order quantities. Weights are approximate dependent upon working tolerance and density of materials.
- (iii) Bending diameter information is intended as a guide to the minimum bend radius at 20°C ambient temperature without restricting the bore. It does not mean that the hose cannot be bent below the given dimensions but restriction is likely to occur.

